
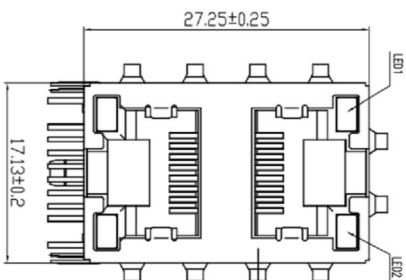


- NOTES:
- ELECTRICAL:
1. VOLTAGE RATING
 2. CURRENT RATING
 3. CONTACT RESISTANCE
 4. INSULATION RESISTANCE
 5. DIELECTRIC STRENGTH
- MECHANICAL:
1. HOUSING & INSERT MATERIAL
 2. CONTACT MATERIAL
 3. SHIELD
 4. MATING/UNMATING FORCE
 5. OPERATING STRENGTH
 6. OPERATING LIFE
- ENVIRONMENTAL:
1. STORAGE
 2. OPERATION
- : 125 VAC RMS.
: 1.5 AMP.
: 30 MILLIOHMS MAX
: 500 MEGOHMS MIN @ 500 NDC.
: 1000 VAC RMS 50Hz or 60Hz, MIN.
: PBT : PA66 UL94-0.
: DIAMETER: .45MM PHOSPHOR BRONZE GOLD
: PLATING OVER NICKEL.
: 0.20" 0.25MM THICKNESS BRASS WITH
: TIN PLATED.
: 2.2KG. F MAX.
: 7.7KG. F MIN BETWEEN JACK AND PLUG.
: 600 CYCLES MIN.
: -10°C ~+40°C RELATIVE HUMIDITY<70%
: -40°C ~+70°C

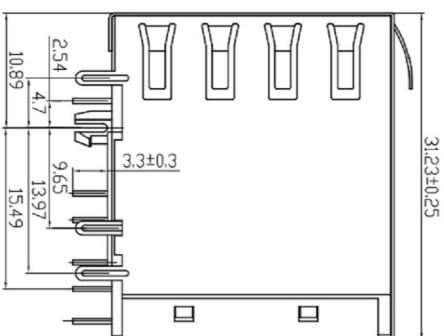

TITLE: 2*1 蘑菇脚 RJ45 带屏蔽带灯			PART NO: JIONS-0015		
X _c ±0.30 X ±0.20		APPD: Mr.WU	DR: Gus chang		
XX ±0.10 .XXX±0.05		CHKD: Mr.WU			
X° ±2° X° ±1°					
DWG NO: WWW.jions.com.cn			客户图		
SHEET:10/1			REV:		

JIONS-0015		
北京玖思启明电子科技有限公司		
Jions		
2012/06/06		
可按照客户要求变更灯的颜色		
REV	ECN NO	DATE
A JIONS-RJ45-0008		