
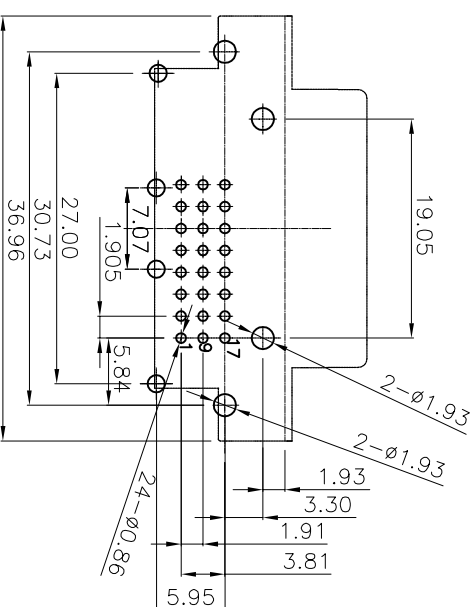


1. HOUSING: THERMOPLASTIC (UL 94V-0).
2. COVER: THERMOPLASTIC (UL 94V-0).
3. TERMINAL: COPPER ALLOY,  
GOLD PLATED ON CONTACT AREA,  
TIN PLATED ON SOLDER TAILS,  
NICKEL UNDER PLATED OVERALL.
4. BOARD LOCK: SPCC, TIN PLATED OVER NICKEL.
5. SHELL: SPCC, NICKEL PLATED OVERALL.
6. RIVET: Zn ALLOY, NICKEL PLATED OVERALL.

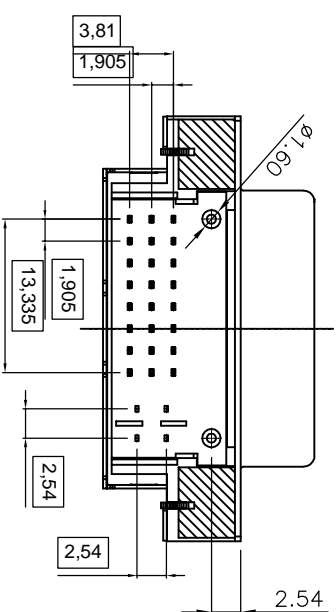

RECOMMEND PCB LAYOUT  
TOLERANCE:  $\pm 0.05$

TITLE:		24PIN 焊板式 母头+后铁壳 +D型铜箔
X. ±0.30	APPD:	Mr.wu
X. ±0.20		
.X ±0.10	CHKD:	Mr.wu
.XXX±0.05		
X. ±2"	DR:	Gus ehng
X. ±1"		
PART NO:		JTIONS-0037

REV	ECN NO	DESCRIPTION	DATE
A	JLIONS-DVI-0010		2011/02/01

**Jions** 北京玖恩启明电子科技有限公司



<b>UNITS:</b> mm	<b>SCALE:</b> 1:
---------------------	---------------------

客户图	DWG NO:
	www.jions.com.cn
SHEET:101	REV: